ANR REAL BOND

Manufacturers

ISO:9001:2015

Reliable bonding solutions



Premium building materials

- **BLOCK JOINTING MORTAR**
- **READY PLASTER**
- **TILE & STONE ADHESIVES**
- **TILE GROUTS**
- **REAL ROCK AAC BLOCKS**

Block Jointing mortar

ANR RealBond Block Jointing Mortar is a ready-to-use, high-performance mortar specifically designed for joining blocks. It offers superior adhesion, crack resistance, and ease of application, ensuring durable and aesthetically pleasing blockwork.



Key Features:

- **Hassle-Free**
- **Crack-Resistant**
- **Easy to Apply**
- **High Bond Strength**
- **Water Resistant**

Technical Specifications:

- **Compressive Strength: > 10 MPa**
- **Water Retention: > 95%**
- **Setting Time: 24-48 hours**
- **Shelf Life: 12 months**



Usage Instructions:

1.Ensure the block surfaces are clean and free from dust.
2.Mix the mortar with water as per the instructions.
3.Apply the mortar evenly between the blocks.
4.Cure for 24-48 hours.

Coverage

Packing : 40 kg per bag colour: grey

Block size	4''	6''	8''	9''
No of Blocks	80-90	50-60	40-50	30-40

Ready Plaster

ANR RealBond Ready Mix Plaster provides a smooth, durable finish for both interior and exterior walls. Its superior bonding properties ensure long-lasting performance and reduced cracking. Save time and effort with this ready-to-use formula.



Key Features:

- **Smooth Finish**
- **Superior Bonding**
- **For Interior & Exterior Walls**
- **Ready to use**
- **Reduces Cracks**



Technical Specifications:

- **Compressive Strength: > 5 MPa**
- **Water Absorption: < 15%**
- **Application Thickness: 6-12 mm**
- **Shelf Life: 9 months**

Usage Instructions:

1.Ensure the wall surface is clean and free from dust and debris.
2.Apply the plaster directly onto the wall.
3.Level the surface with a trowel.
4.Cure for 72 hours.

Coverage

Packing : 40 kg per bag colour: grey

Thickness	6mm	8mm	10 mm	12mm
sq.ft	30-36	24-28	18-20	16-18

Tile Adhesive R- 305

ANR RealBond Tile Adhesive offers a reliable grip and long -lasting durability for all types of tiles. Its waterproof and heat- resistant properties make it ideal for both interior and exterior application,ensuring a strong and secure bond.



Key Features:

- **Reliable Grip**
- **Long-Lasting Durability**
- **For All Types of Tiles**
- **Waterproof**

Technical Specifications:

- **Tensile Adhesion Strength: > 1 MPa**
- **Open Time: 20 minutes**
- **Adjustability Time: 30 minutes**
- **Shelf Life: 12 months**



Usage Instructions:

1.Ensure the surface is clean, dry, and level.
2.Mix the adhesive with water as per the instructions.
3.Apply the adhesive evenly to the surface.
4.Place the tiles and press firmly.
5.Allow 24 hours for curing.

Coverage

Packing: 20 kg per bag colour : grey

55 to 60 sq.ft per 20 kg bag with 6mm*6mm notch trowel (The coverage will vary based on the size and type of tile)

Tile Adhesive R- 315

Real Bond 315 is a polymer modified,cement based ,high quality tile adhesive for fixing vitrified ,ceramic,clay,all stonesand glass mosaic tiles floor and wall in internal areas over cementitious substates.It isr ecommended to use for
Tile -on-Tile application.



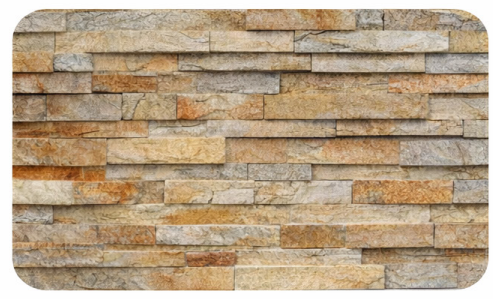
Key Features:

- **Suitable for all tiles,granites ,marbles ,stones**
- **Premium Quality & high durability**
- **Self curing & slip resistance**
- **Interior & exterior aapplications**

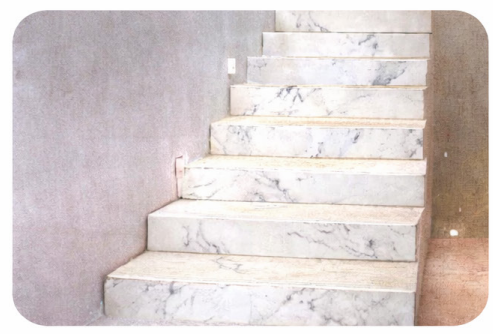
Technical Specifications:

- **Tensile Adhesion Strength: > 1 MPa**
- **Open Time: 20 minutes**
- **Adjustability Time: 30 minutes**
- **Shelf Life: 12 months**


Floor Tiles


3D Wall Tiles


Swimming Pool Tiles


Marbles

Usage Instructions:

1.Ensure the surface is clean, dry, and levelled.
2.Mix the adhesive with water as per the instructions.
3.Apply the adhesive evenly to the surface.
4.Place the tiles and press firmly.
5.Allow 24 hours for curing.

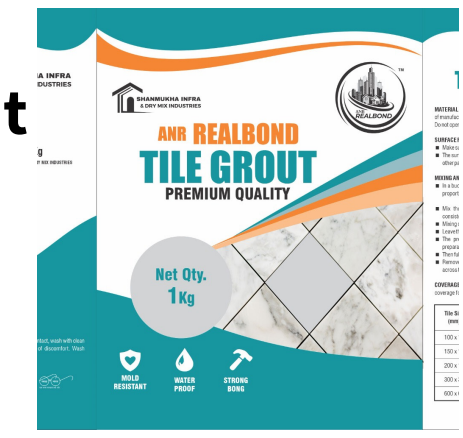
Coverage

Packing: 20 kg per bag colour : grey

55 to 60 sq.ft per 20 kg bag with 6mm*6mm notch trowel (The coverage will vary based on the size and type of tile)

Tile Grout

ANR REALBOND Tile Grout is a premium-quality grout designed for strong, durable tile joints.It offers excellent water resistance and mold protection for long-lasting performance.Easy to mix and apply, it ensures smooth filling and a neat finish.Ideal for residential and commercial tiling applications.



ANR REAL BOND

Construction made simple



Our prestigious clients

meil

DRDO — Defence R&D Organisation — Ministry of Defence

VISHAL sanjivini

DRS International School — Since 2003 — Strive to Surpass — IB World School

ASHRAYA

Janapriya

PRAJAY Engineers Syndicate Ltd.

Sri Chaitanya Educational Institutions — India

PVR PROJECTS LTD.

KAMINENI HOSPITALS

SV Infra Projects — The way to build

VilvaInfra

Contact us: 8790574488 | 9533398415

anrrealbondinfra@gmail.com

anrrealbond

www.anrrealbondinfra.com

Our address:

Sy No 157, Nr Cheeriyala Kamman, Cheeriyala, Medchal Malkajgiri, Hyderabad, Telangana-501301